

Low frequency ground wire choke, fully potted resin



**Description**

- Ground wire chokes (earth line chokes)
- Wire leads
- Fully potted resin

**Standards**

- EN 60938

**Applications**

- Separating the main earth line to periphery devices
- This type of chokes permits the building of a system free of ground wire loops

**References**

**Weblinks**

General Product Information, Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check

**Technical Data**



Rated Current	16 - 25 A @ Ta 40 °C
Rated inductance	0.02 - 4 mH
Power Operating Frequency	< 5 MHz
Terminal technic	Wire leads
Material: Housing	UL 94V-0
Sealing Compound	UL 94V-0

Isolation Voltage	2 kV eff., winding to ambient
Climatic Category	25/100/21 acc. to IEC 60068-1
Allowable Operation Temp.	-25 °C to 100 °C

**Dimensions**

Case 25

Case 40

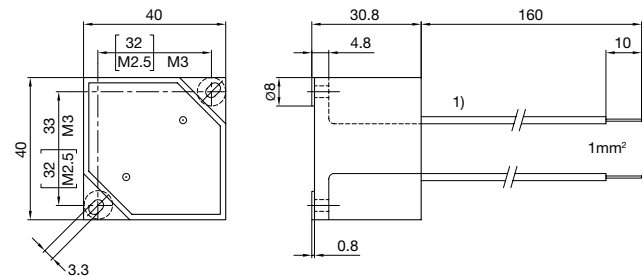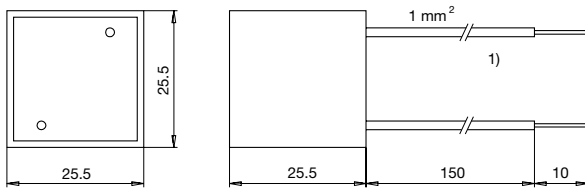

1) yellow/green

**Variants**

$I_n$ [A]	$L_n$ [mH]	$R_{cu}$ [mΩ]	$f_{RES}$ [MHz]	Weight [g]	Packing unit [pcs.]	Order Number
16	4	27	0.3	42	50	DEN-25-0001
25	4	10.5	0.3	38	50	DEN-40-0001