



MicroStac[®] 0.8 mm Mezzanine Connector System



MicroStac® - 0.8 mm Mezzanine Connector System

Table of Contents

Applications2
Technical Features3
Mating Conditions4
Electrical and Mechanical Characteristics5
Packaging7
6 Pin Single Row Version9
9 Pin Single Row Version11
12 Pin Single Row Version13
14 Pin Single Row Version15
50 Pin Dual Row Version17
Part Number Index19
Notes20

MicroStac® - 0.8 mm Mezzanine Connector System

Applications




- Sensor engineering: Light barriers, switches
- Medical engineering: Intensive medical equipment, portable diagnostics
- Mobile communication: Mobile phones, PDAs, organizer, memory modules
- Car electronics: Car radios, mobile car phones, mobile car office equipment
- Control engineering: Mini PLCs, fieldbus modules, mini solenoid systems
- Facility management: Signal and indicator devices, alarm systems and bus modules

Derating Curve

In spite of the small design of the ERNI MicroStac series, they reach a high current rating. The contacts feature large radiant surfaces to derive heat. The derating curve shows the 50pin version without PCB.

For further derating curves related to the according pin count see our webpage.

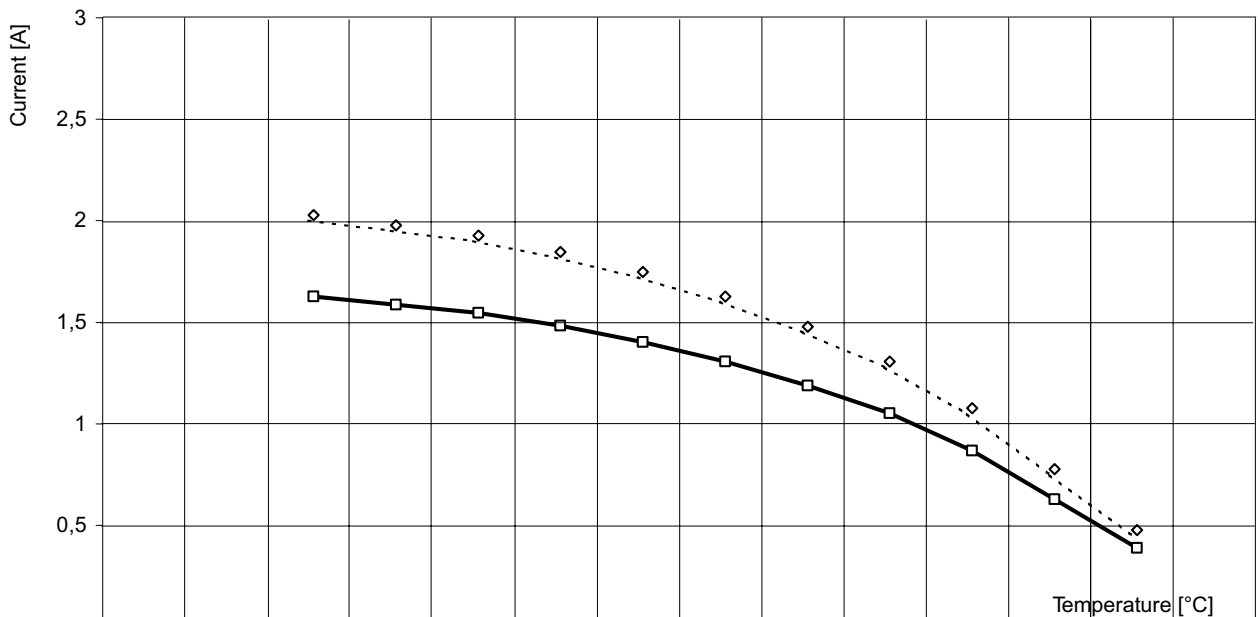


Basecurve[A]

Derating curve[A]

MicroStac® - 0.8 mm Mezzanine Connector System

Technical Features

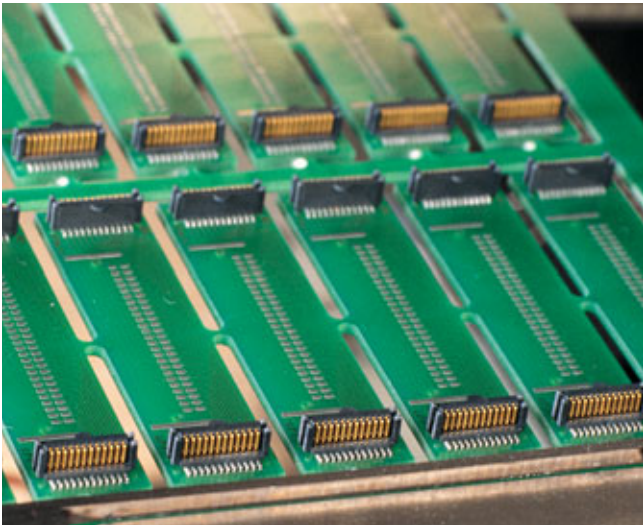

Controlled SMT Reflow Soldering Process

The heat-resistant thermoplastic insulator and precision coplanar contacts permit a controlled SMT soldering process.




Safe Packaging and Fully Automated Feed

The antistatic tape and reel packaging not only protects the high-precision contacts and coplanarity of our MicroStac connectors, but also permits placement of connectors by automated pick and place equipment



Easy Recognition and Secure Handling

The black insulation body ensures easy visual recognition by the automatic pick and place equipment.

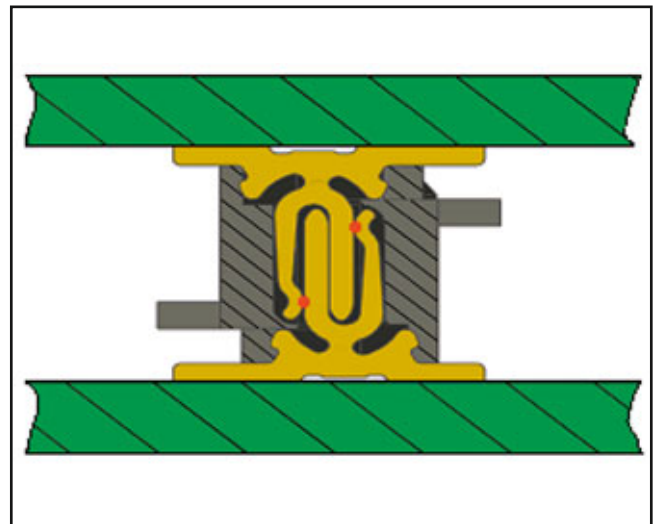

Contact Design for 5 mm Stacking Height


The MicroStac contacts are based on a patented hermaphroditic contact design with two contact points for compensation of tolerances.

Patent-no.: DE 19 809 881; US 6,379,170


MicroStac® - 0.8 mm Mezzanine Connector System

Mating Conditions


Allowed misalignment tolerances longitudinal: ± 0.7 mm, transverse: ± 0.5 mm

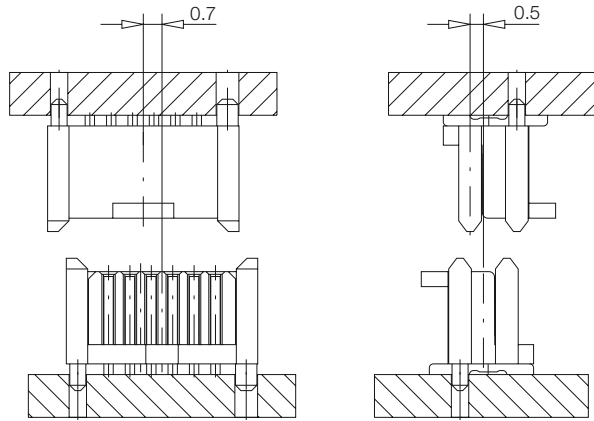

Allowed angular inclination tolerances longitudinal: $\pm 4^\circ$; transverse: $\pm 4^\circ$

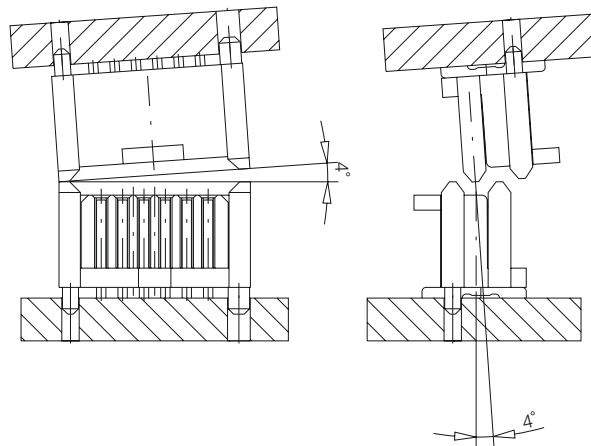

Wipe length - maximum "Board to Board" distances (5 mm Stacking Height) for secure mating: 1.5 mm

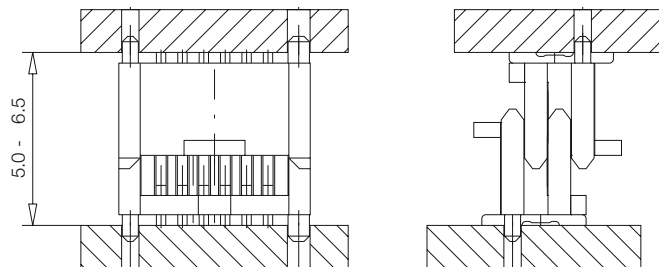

All dimensions in mm

MicroStac® - 0.8 mm Mezzanine Connector System

Electrical and Mechanical Characteristics

	Standard	1 Row and 2 Row Versions
Number of Pins		6, 9, 12, 14, 50
Technical data		
Climate Category	DIN EN 60068-1 test b	-55/125/21
Temperature range		-55/125 °C
Current rating per contact		50 pin version: 1.6 A @ 20°C 1.3 A @ 70°C 0.8 A @ 100°C
Air – and creepage distance		0.4 mm
Voltage rating	IEC 60664	The permissible operating voltages depends on the customer application and on the applicable or specified safety requirements. Insulation coordination according to IEC 60664-1 has to be regarded for the complete electrical device. Therefore, the maximum creepage and clearance distances of the mated connectors are specified for consideration as a part of the whole current path. In practice, reductions in creepage or clearance distances may occur due to the conductive pattern of the printed board or the wiring used, and have to be taken into account separately. As a result the creepage and clearance distances for the application may be reduced compared to those of the connector.
Dielectric strength	IEC 60512	contact – contact 500 V _{rms}
Contact resistance	IEC 60512 test 2a	< 10 mΩ
Insulation resistance	IEC 60512 test 3a	> 10 ⁴ MΩ
Vibration, sine	IEC 60512 test 6d	10 – 2000 Hz 20 g
Contact disturbance (while vibration test)	IEC 60512 test 2e	< 1 μs
Shock, halfsine	IEC 60512 test 6c	50 g 11 ms
Contact disturbance (while shock test)	IEC 60512 test 2e	< 1 μs
Mechanical operation (mating cycles)	IEC 60512 test 9a	< 10 mating cycles
Insertion and withdrawal force	IEC 60512 test 13b	3 mm Stacking Height : max. 4 N per contact 5 mm Stacking Height : max. 2 N per contact

MicroStac® - 0.8 mm Mezzanine Connector System

Electrical and Mechanical Characteristics

	Standard	1 Row and 2 Row versions
Number of Pins		6, 9, 12, 14, 50
Process-conditions		
Solder temperature max.	IEC 68-2-20	
Hand soldering temperature max.		3.5 s at 350 °C
Dip soldering temperature max.		10 s at 260 °C
Reflow soldering temperature max.	JEDEC J-STD-020C	20 - 40 s at 260 °C
Coplanarity		< 0.1 mm
Housing materials		
Plastic material		PA 46
CTI value	IEC 60112	CTI 225
UL flame rating		UL 94 V-0
UL file		E 47960
Contact materials		
Base material		Cu alloy
Mating area		0.1 µm Au over 1-2 µm Ni
Termination area		4-6 µm Sn over 1-2 µm Ni
Environment compatibility		
Recycling	no flame-retardent additives, no toxic additives allows easy recycling	



MicroStac® - 0.8 mm Mezzanine Connector System

Packaging


6 Pin Version

Verpackt in Gurtverpackung
Verpackungseinheit: 1700 Stück

Tape on Reel Packaging
Packaging unit: 1700 pcs





Abspulrichtung - Reel off Direction




9 Pin Version

Verpackt in Gurtverpackung
Verpackungseinheit: 1750 Stück

Tape on Reel Packaging
Packaging unit: 1750 pcs





Abspulrichtung - Reel off Direction

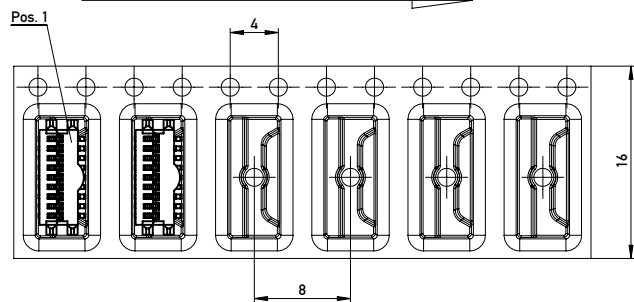


12 Pin Version

Verpackt in Gurtverpackung
Verpackungseinheit: 1300 Stück

Tape on Reel Packaging
Packaging unit: 1300 pcs



Abspulrichtung - Reel off Direction

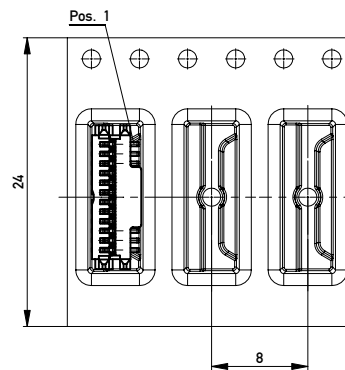

All dimensions in mm



MicroStac® - 0.8 mm Mezzanine Connector System

Packaging

14 pin Version

Verpackt in Gurtverpackung
Verpackungseinheit: 1300 Stück



Tape on Reel Packaging
Packaging unit: 1300 pcs

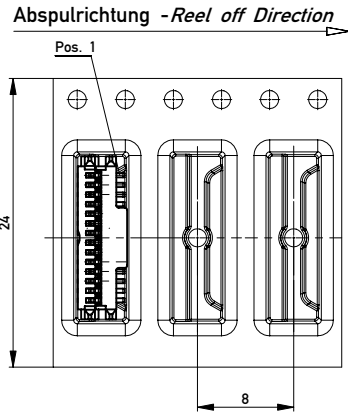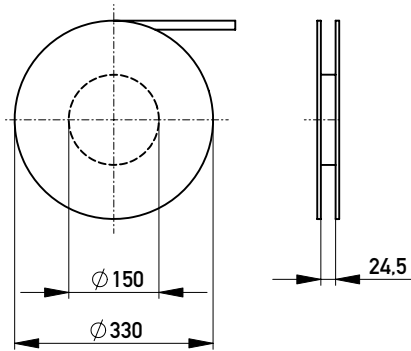

50 Pin Version

Verpackt in Gurtverpackung
Verpackungseinheit: 800 Stück

Tape on Reel Packaging
Packaging unit: 800 pcs

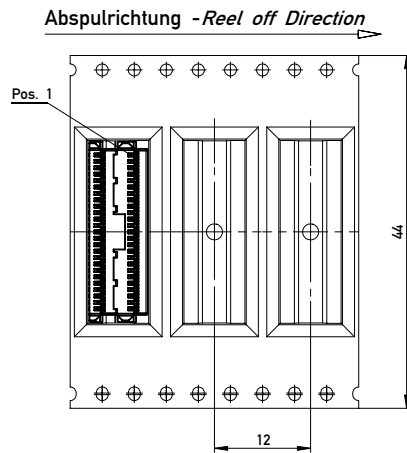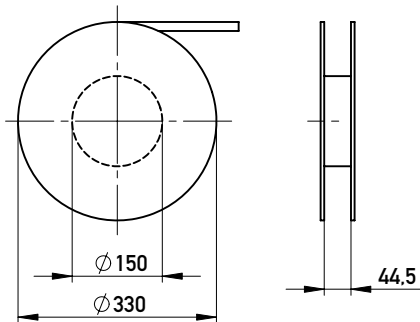

All dimensions in mm




MicroStac® - 0.8 mm Mezzanine Connector System

6 Pin Single Row Version




- Pitch 0.8 mm
 - SMT process compatible
 - Hermaphroditic contact design, two contact points
 - One part number for interconnection saving admin and logistic costs
 - Integrated pick and place pad and very low weight for high speed assembly
 - Positioning pegs
 - Secure standing while solder process, large solder pads
 - Black insulation body and silver terminals for optical vision system (contrast measuring method)
 - Polarization and pre-alignment while mating
- Component weight 6 Pin: 0.14 g
 - Large wipe length 1.5 mm
 - Mated stacking height 5 mm

Dimensional Drawing

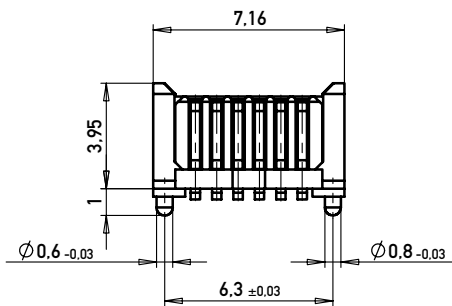

Koplanarität der Anschlüsse $\leq 0,1\text{mm}$
Coplanarity area of termination $\leq 0,1\text{mm}$


Leiterplatten-Layout Vorschlag PCB-Layout Proposal

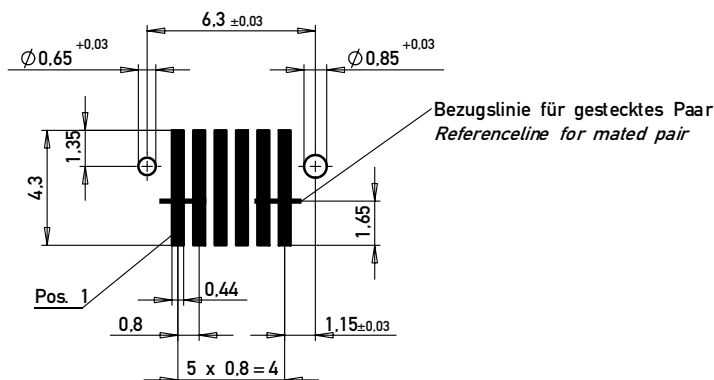


All dimensions in mm

MicroStac® - 0.8 mm Mezzanine Connector System

6 Pin Single Row Version

Configuration	Number of Pins	Termination	Mated Stacking Height	Part Number
	6	SMT	5 mm	114711
Single row with peg, tape and reel, 1700 pcs/reel				

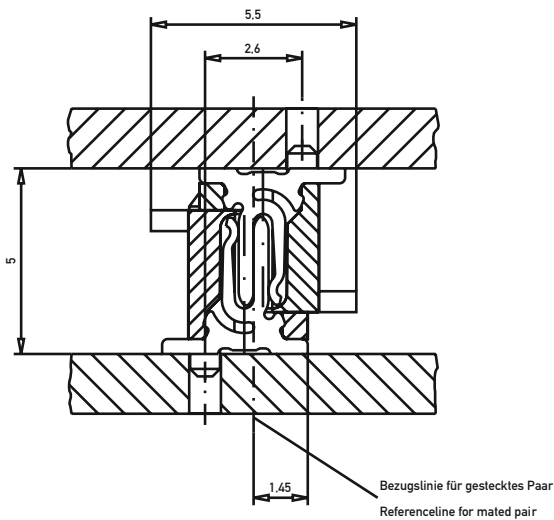

All dimensions in mm

