

**Recommended P.C.B Layout**

**Materials**

Insulator : PBT, UL 94V-0

Contact : Brass

**Specification**

Current rating : 3 Amp

Insulation resistance : 5,000M  $\Omega$  min.


Contact resistance : 20m  $\Omega$  max.

Withstanding voltage: AC 500V for 1 minute

Operating Temperature : - 40°C ~ + 105°C

**Order Information**

**BH - XX S X**

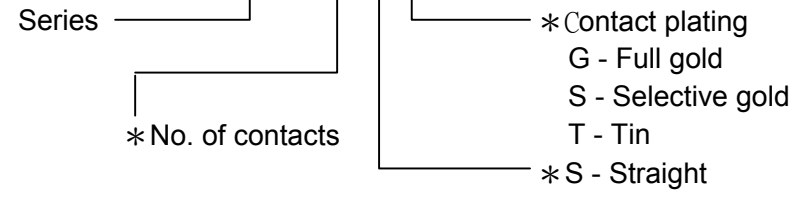

No. of contact	Dimensions			No. of contact	Dimensions		
	A	B	C		A	B	C
6	15.20	12.80	5.08	30	45.70	43.50	35.56
8	17.78	15.48	7.62	34	50.80	48.58	40.64
10	20.30	18.10	10.16	40	58.40	56.20	48.26
12	22.84	20.64	12.70	44	63.48	61.28	53.34
14	25.38	23.18	15.24	50	71.10	68.90	60.96
16	27.92	25.72	17.78	56	78.72	76.52	68.58
20	33.00	30.80	22.86	60	83.80	81.60	73.66
24	38.08	35.88	27.94	64	88.88	86.68	78.84
26	40.62	38.42	30.48				