



Ansaughaube
hood

Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 280 Stück
Packaging unit: 280 pcs



Abspulrichtung - Reel off Direction

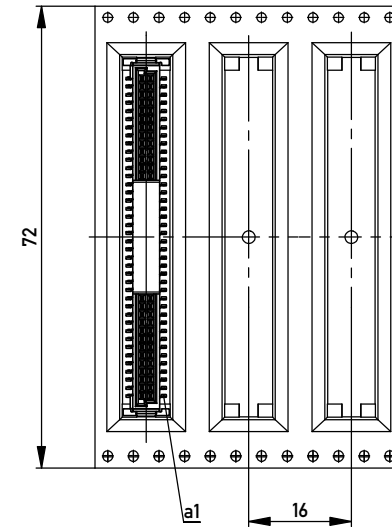

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

BA 7-03 - Standard Bauhöhe

type 7-03 - standard assembly height

Information:		Tolerances	Scale 3:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		All Dimensions in mm	Designation Federl. SMC-B 80-SMD-BA7-03 Female SMC-B 80-SMD-type7-03
Subject to modification without prior notice. Drawing will not be updated.		www.ERNI.com	154721
e	10.12.2013	ERNI	I
Index	Date	www.ERNI.com	A3
Class		SMCB	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16100 to be observed.