

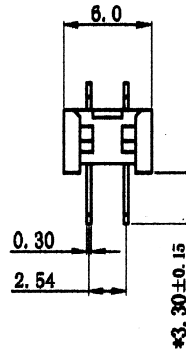
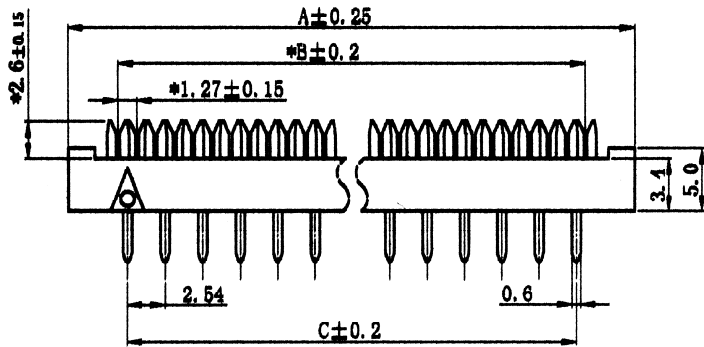




**RoHS Compliant**

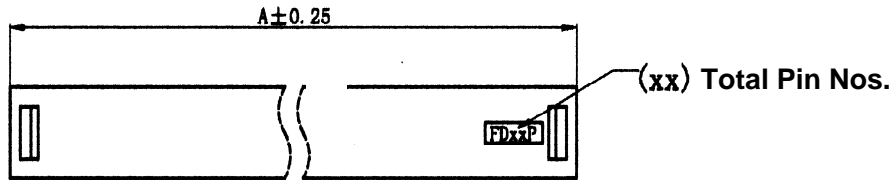

**Materials**

Insulator : PBT, UL 94V-0

Contact : Copper Alloy

**Specification**

Current rating : 1 Amp

Voltage rating : 250V AC, DC

Insulation resistance : 1,00M  $\Omega$  min.

Contact resistance : 1  $\Omega$  max.


Withstanding voltage: AC 500V for 1 minute

Operating Temperature : - 40°C ~ + 105°C

**Order Information**

**FDP - XX X**

Series



\*Contact plating

G - Full gold

S - Selective gold

T - Tin

No. of contact	Dimensions			No. of contact	Dimensions		
	A	B	C		A	B	C
6	13.07	6.35	5.08	26	38.47	31.75	30.48
8	15.61	8.89	7.62	30	43.55	36.83	35.56
10	18.15	11.43	10.16	34	48.63	41.91	40.64
12	20.69	13.97	12.70	40	56.25	49.53	48.26
14	23.23	16.51	15.24	50	68.95	62.23	60.96
16	25.77	19.05	17.78	60	81.65	74.93	73.66
20	30.85	24.13	22.86	64	86.73	80.01	78.74
24	35.93	29.21	27.94				