

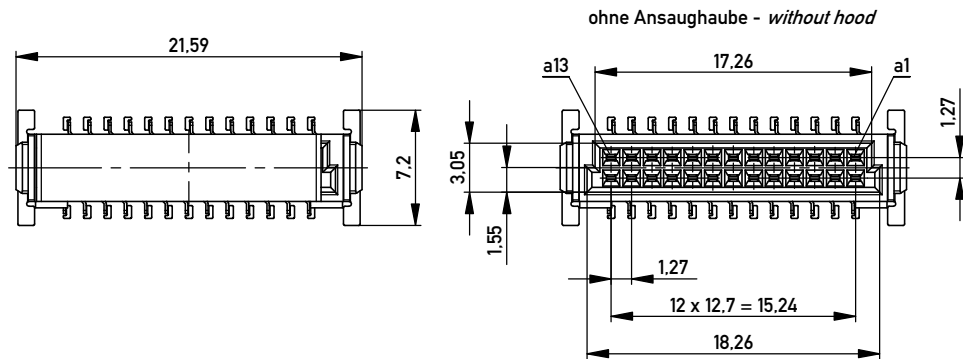



Verpackt im Gurt nach DIN IEC 60286-3  
 Tape on Reel Packaging according to DIN IEC 60286-3  
 Verpackungseinheit: 280 Stück  
 Packaging unit: 280 pcs

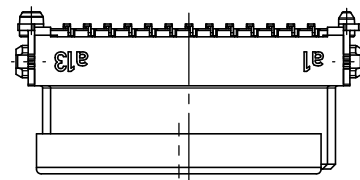


Abspulrichtung - Reel off Direction

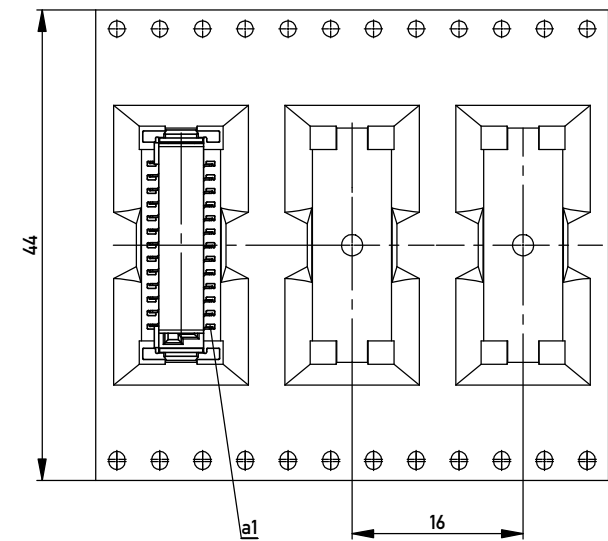

Leiterplatten-Layout Vorschlag für SMT  
 PCB-Layout Proposal for SMT

Anforderungsstufe 1  
 Performance Level 1  
 Kontaktbereich vergoldet  
 Mating Area gold plating  
 Anschlussbereich verzinkt 4-6 µm  
 Terminal Area 4-6 µm tin plating  
 Koplanarität der Anschlüsse ≤ 0.1 mm  
 Coplanarity Area of Termination ≤ 0.1 mm

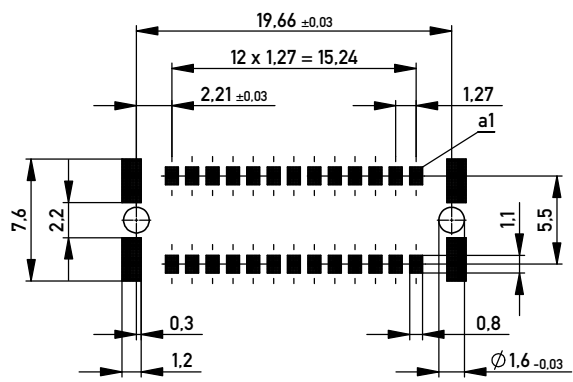

BA 7-03 - Standard Bauhöhe  
 type 7-03 - standard assembly height

Information:		Tolerances	 All Dimensions in mm	Scale	3:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation <b>Federl. SMC-B 26-SMD-BA7-03</b> <i>Female SMC-B 26-SMD-type7-03</i>	
 www.ERNI.com		<b>154718</b>		I <b>A3</b>	
f	09.12.2013	Date		Class	
Index		Date		SMCB	

Copyright by ERNI GmbH  
 Proprietary notice pursuant to ISO 16106 to be observed.