


RoHS Compliant

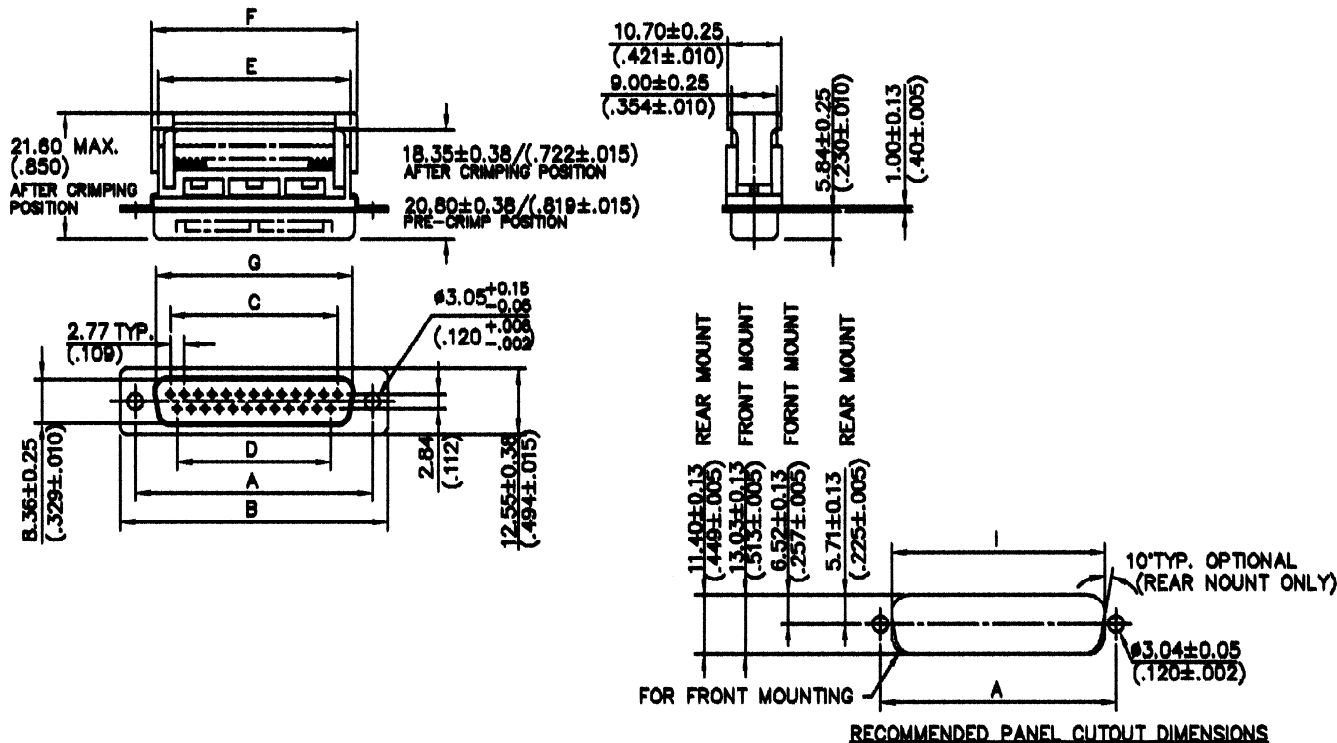

Dimensions

No. of contact	Dimension								
	A	B	C	D	E	F	G	l(Rear)	l(Front)
09	24.99	30.78	11.08	8.31	16.10	18.60	16.92	20.47	22.20
15	33.32	39.09	19.38	16.61	24.00	26.60	25.25	28.80	30.53
25	47.04	53.09	33.25	30.48	38.15	40.90	38.96	42.52	44.27
37	63.50	69.40	49.86	47.09	54.61	57.10	55.45	59.08	60.73

Material


Insulator: PBT & G/F reinforced, UL 94-V0
 Contact: Phosphor Bronze, Selective gold over Nickel
 Strain Relief: PBT & G/F reinforced, UL 94-V0
 Shell: SPCC, Tin plated

Specification

Current rating: 1 Amp.
 Insulation resistance: 1,000M Ωmin. (at DC 500V)
 Dielectric withstand: AC 500V min. for 1 minute
 Operating Temperature: - 55°C ~ + 105°C
 Contact resistance: 15m Ω max.
 Wire size: AWG 26 & 28 stranded, 1.27mm conductor centre Flat Cable


Order Information

DIF - XX M X 2 P S

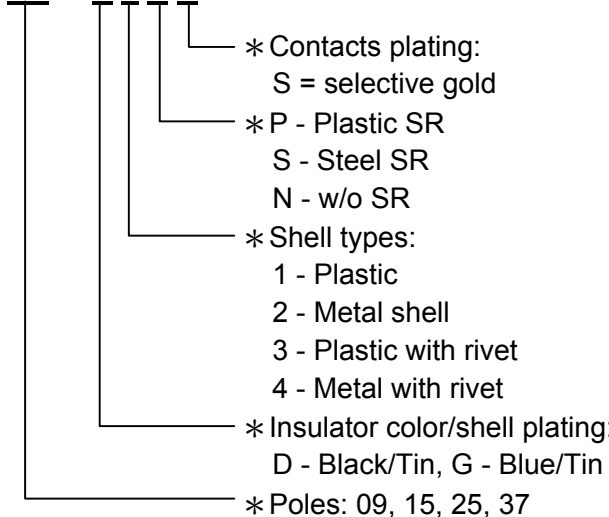

- * Contacts plating:
S = selective gold
- * P - Plastic SR
S - Steel SR
N - w/o SR
- * Shell types:
1 - Plastic
2 - Metal shell
3 - Plastic with rivet
4 - Metal with rivet
- * Insulator color/shell plating:
D - Black/Tin, G - Blue/Tin
- * Poles: 09, 15, 25, 37

RoHS Compliant

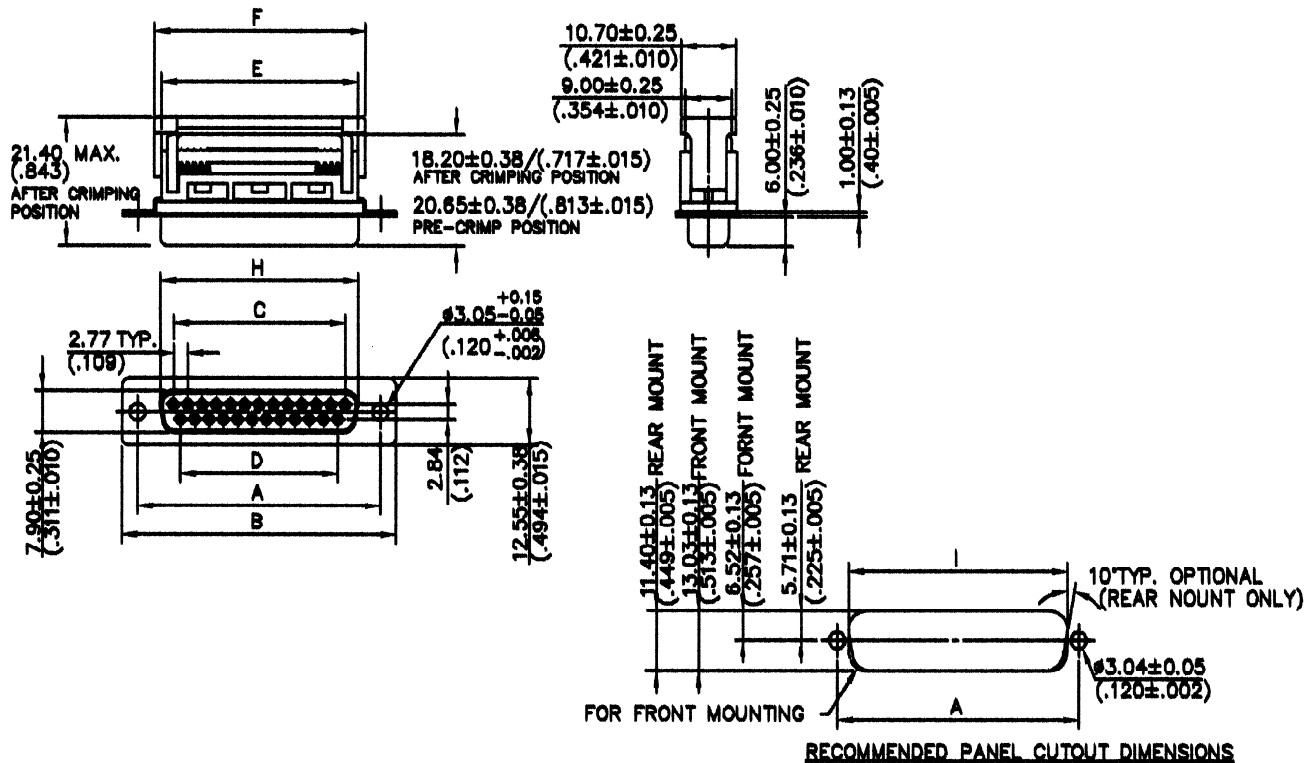

Dimensions

No. of contact	Dimension								
	A	B	C	D	E	F	H	I(Rear)	I(Front)
09	24.99	30.78	11.08	8.31	16.10	18.60	16.33	20.47	22.20
15	33.32	39.09	19.38	16.61	24.00	26.60	24.66	28.80	30.53
25	47.04	53.09	33.25	30.48	38.15	40.90	38.38	42.52	44.27
37	63.50	69.40	49.86	47.09	54.61	57.10	54.84	59.08	60.73

Material

Insulator: PBT & G/F reinforced, UL 94-V0
 Contact: Phosphor Bronze, Selective gold over Nickel
 Strain Relief: PBT & G/F reinforced, UL 94-V0
 Shell: SPCC, Tin plated

Specification

Current rating: 1 Amp.
 Insulation resistance: 1,000 Mohm min. (at DC 500V)
 Dielectric withstand: AC 500V min. for 1 minute
 Operating Temperature: - 25°C ~ + 85°C
 Contact resistance: 15 mohm max.
 Wire size: AWG 26 & 28 stranded, 1.27mm conductor centre Flat Cable

Order Information

DIF - XX F X 2 P S

- * Contacts plating:
S = selective gold
- * P - Plastic SR
S - Steel SR
N - w/o SR
- * Shell types:
1 - Plastic
2 - Metal shell
3 - Plastic with rivet
4 - Metal with rivet
- * Insulator color/shell plating:
D - Black/Tin, G - Blue/Tin
- * Poles: 09, 15, 25, 37