

# SMC - 1.27 mm Connectors

## RIGHT ANGLE FEMALE





### PRODUCT SPECIFICATION



- SMT termination
- dual row connector
- data rates up to 3 Gbit/s
- location pegs for exact board placement
- black insulation body for fast and reliable visual recognition
- fully automated board assembly




### DIMENSIONAL DRAWINGS

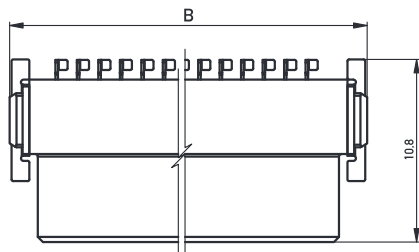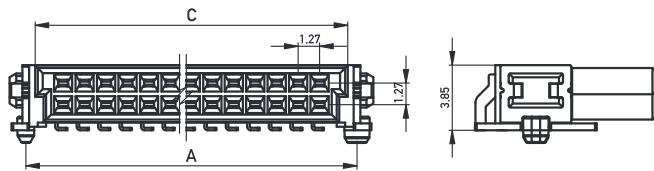

12	10,77	12,70	9,37
16	13,31	15,24	11,91
20	15,85	17,78	14,45
26	19,66	21,59	18,26
32	23,47	25,40	22,07
40	28,55	30,48	27,15
50	34,90	36,83	33,50
68	46,33	48,26	44,93
80	53,95	55,88	52,55
No. of contacts	A	B	C

#### Recommended Layout

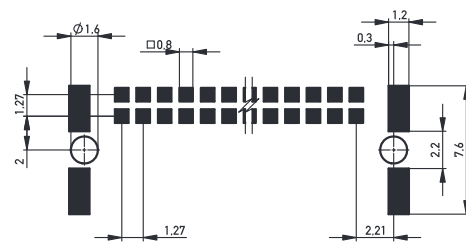

## SMC - 1.27 mm Connectors

### RIGHT ANGLE FEMALE —

#### ORDERING INFORMATION

No. of Pins	Packaging	Part Number
12	Tape and reel	154740
16	Tape and reel	354078
20	Tape and reel	354079
26	Tape and reel	154741
32	Tape and reel	354080
40	Tape and reel	354081
50	Tape and reel	154742
68	Tape and reel	154743
80	Tape and reel	154744